



福建福晟新材料科技有限公司

Fujian Fusheng New Material Technology Co.,LTD

生产总部:福建省尤溪县经济开发区城西园(红土地工业大道34号)

运营中心:福建省福州市台江区上浦路富力中心B3栋1511-1512

公司电话:15960021748



新型环保弹性石晶地 / 墙板





Spc
石晶地板的自我修养
Self-cultivation of SPC flooring

Spc石晶地板的主要原料是天然石粉

生产过程中**不使用胶水**

地板**0甲醛**,无异味,不含有毒重金属

防火阻燃、防滑、耐磨耐刮,可**正常使用20年**

安装/拆除简单,可重复使用

欧美等发达国家都在使用

The main raw material of Spc flooring is natural stone powder

Glue is not used in the production process

0 formaldehyde, no odor, not containing toxic heavy metals

Fireproof, anti-slip, waterproof, wear-resisting, can be used for 20 years.

Easy installation and removal.

Super popular in European and American market

关于我们

About us



福建福晟新材料科技有限公司位于福建省尤溪县经济开发区城西园,是一家集设计、研发、生产、销售服务于一体的绿色新型地面装饰材料生产企业。为当地重点企业,总投资1.3亿元。

Fujian Fusheng New Material Technology CO.,Ltd is located in the Youxi economic development zone, Fujian, China. As a green ground decorative material manufacturer, Fusheng covers design, research and development, production, sales and service. It is local key enterprise with total investment of 20 million US dollars.

公司产品主要生产新材料技术的SPC等环保地板、墙板等。具有绿色环保、超轻超薄、超强耐磨、高弹性、抗冲击、强防滑,防火阻燃、防水防潮、抗菌防霉、吸音防噪、耐酸碱腐蚀、导热保暖、铺装简捷、保养方便等特点,花色品种繁多,如木纹、石纹、地毯纹等,纹路美观逼真,配以丰富多彩的辅料和装饰条能组合出绝美的装饰效果。

Fusheng's main products include environment-friendly SPC flooring and wall panel, which are ultra-light and ultra-thin, super wear-resisting, high elasticity, shock resistance, anti-slip, fireproof, waterproof, anti-bacterial and anti-mildew, sound absorbent and noise reducing, acid and alkali corrosion resistance, heat conduction and heat preservation, easy installation and maintain. Rich patterns, such as wood grain, stone grain, carpet pattern, etc. Combined with colorful accessories and decorative strips can present you exquisite decorative effects.

同时,我们也是全球可持续性发展的支持者,致力于通过使用环保材料为环境保护事业做出贡献。

At the same time, as a supporter of global sustainability, our company is committed to protecting the environment through the use of environment-friendly materials.

为保护日益稀缺的森林资源,产品主要采用非金属矿石及环保、无毒、可回收的聚氯乙烯为产品主要原材料。不含甲醛、重金属和任何放射性元素,是从内到外的绿色新型地面装饰材料,产品广泛应用于星级酒店、高级办公楼、精装商品房、医院、学校和家庭等领域。无论是生产过程,还是产品材质,无处不体现出晟福人对“绿色健康环保”理念的恪守。

In order to protect the increasingly scarce forest resources, our products mainly use nonmetal ores and environmental, non-toxic, recyclable polyvinyl chloride as the main raw materials.

It's free of formaldehyde, heavy metals and any radioactive elements. It is a new green ground decoration materials and products that are widely used in hotel, office building, hospital, school and family. Whether it is the production process or the product material, Fusheng always adherence to the concept of "green health & environmental protection".

公司秉持“诚信、奋斗、创新、共享”的核心价值观,以“追求员工物心幸福,专注客户满意体验,致力公司价值提升,践行企业社会责任,保护地球森林资源”为企业使命,努力实现“成为具有全球弹性地板行业标杆,成就基业长青的幸福企业”的公司愿景。

Fusheng upholds the core values of "integrity, struggle, innovation, sharing", with our corporate mission of "pursuit of employee's happiness, focus on customer satisfaction, dedicate to company value improvement, practice corporate social responsibility, protect the earth's forest resources".

We strive to achieve the vision of "becoming a globally competitive benchmark for the resilient floor industry".





生产设备

Production equipment



公司拥有近万平米的现代化大跨距厂房,拥有多条国内最先进的自动化生产流水线,引进日本“安田”先进的多条开槽生产设备,且拥有众多高科技人才。优越的工厂条件和专业而富有活力的人才优势,确保了公司每年上千万平米高品质的环保地板的产能。企业通过ISO9001质量管理体系认证、OHSAS18001职业健康安全管理体系认证,产品通过CE等国内、国际权威机构认证。福晟在我们的努力下日益成长强大,并且我们有足够的信心在未来成为中国地板行业的引领者。


Fusheng owns a modern and large-span factory with an area nearly 10,000 square meters, equipped with advanced Japan YASUDA slotting machines and advanced automated production lines. With a world first-class workshop and professional talents, Fusheng has annual production capacity of more than 10 million square meters of high-quality flooring. Our company and our products have been certificated by ISO9001, OHSAS18001, CE, etc. Fusheng is growing stronger with our efforts and we have full confidence to become the leader of Chinese flooring industry in near future.

晟福人零甲醛地板

Saint Fort zero formaldehyde floor

十年前用强化地板，十年后用环保弹性石晶地板。十年前，强化地板凭借出色的耐磨度与丰富的花色风靡全球，但始终没法解决甲醛问题。十年后，晟福人为中国带来了环保弹性零甲醛石晶地板。该产品不仅保留了强化地板的优势，而且彻底解决了甲醛问题。

People have been using laminated flooring for ten years which is not solve the problem of formaldehyde. Now Saint Fort brings environment-friendly zero formaldehyde floor to China. Saint Fort's products completely solve the problem of formaldehyde and have the advantages of laminated floor.

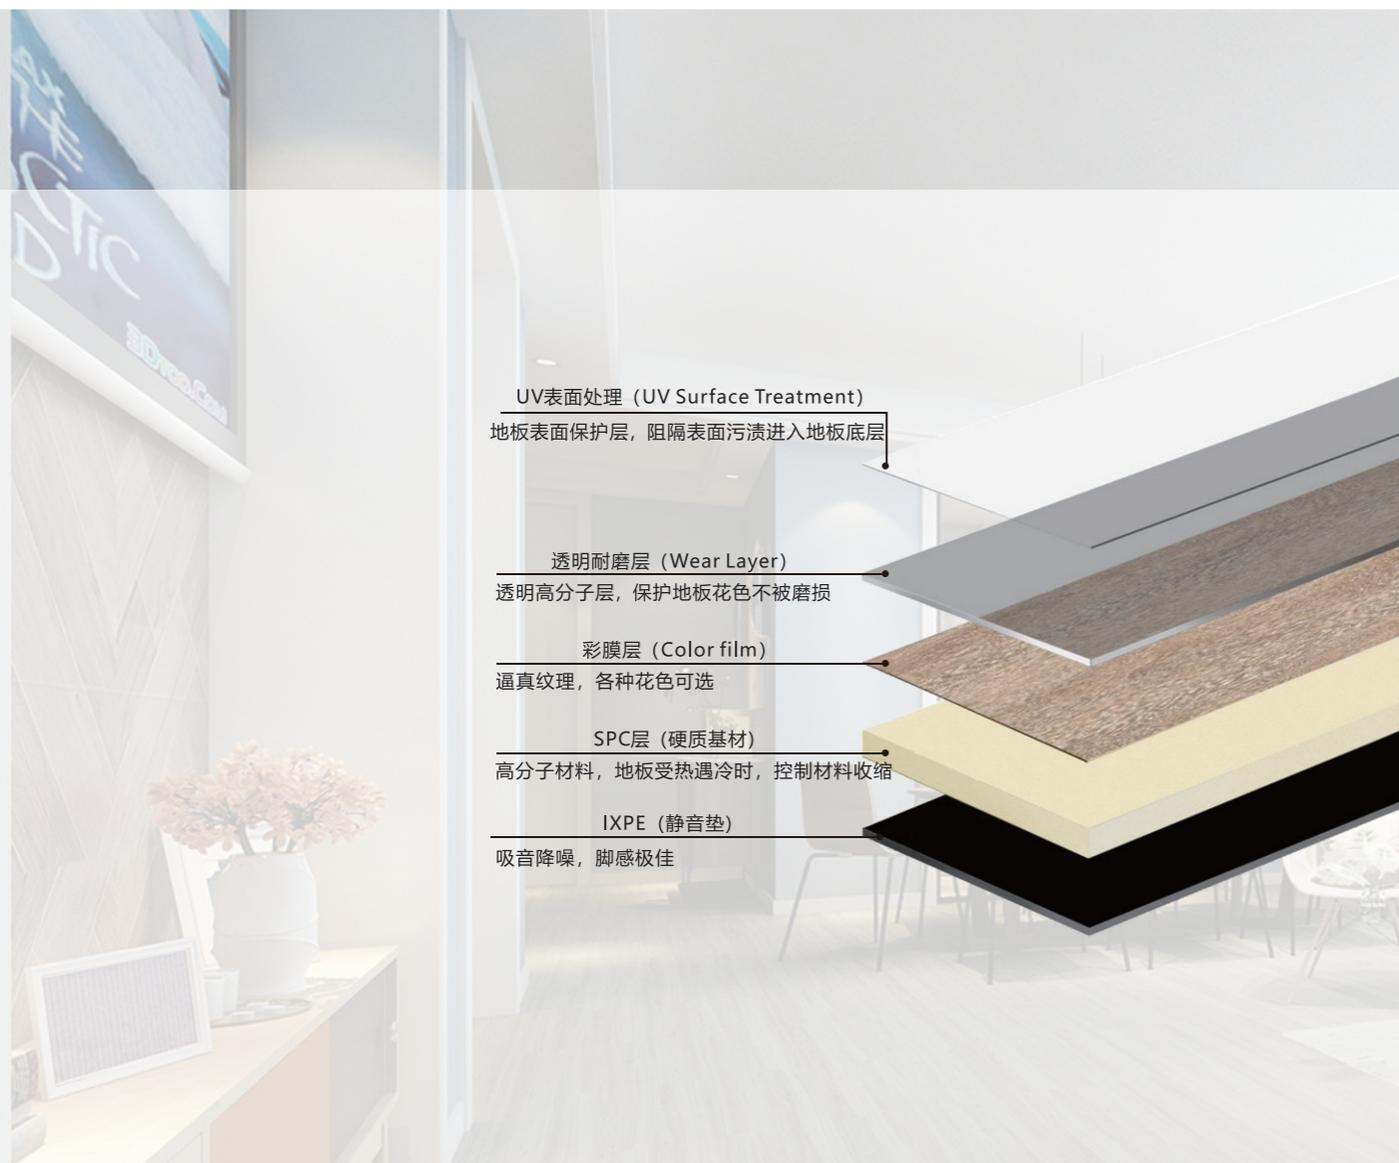

UV表面处理 (UV Surface Treatment)

地板表面保护层, 阻隔表面污渍进入地板底层

透明耐磨层 (Wear Layer)

透明高分子层, 保护地板花色不被磨损

彩膜层 (Color film)

逼真纹理, 各种花色可选

SPC层 (硬质基材)

高分子材料, 地板受热遇冷时, 控制材料收缩

IXPE (静音垫)

吸音降噪, 脚感极佳

石晶地板SPC(Stone Plastic Composite),是基于高科技开发的新型环保型地板,具有防水、防火、防滑、静音、耐磨、零甲醛等特点。SPC地板材料使用环保配方,不含重金属、邻苯二甲酸酯甲醛等有害物质,符合EN14372、EN649-2011、IEC62321、GB4085-83标准,在欧美发达国家级亚太市场广受欢迎。凭借其出色的稳定性和耐用性,石晶地板既解决了实木地板受潮变形霉烂的问题,又解决其他装修材料的甲醛问题。它可供选择的花色图案众多,适用于室内家装、酒店、医院、商场等公共场所。

特点 Characteristic



100%防水
100%Waterproof



适合在任何硬质地面安装
Installation On Any Surface



不收缩、不膨胀
Will Not Expand Or Contract



降噪音表现优秀
Reduces Noise



不受温度影响
No Acclimatization Necessary



具备保暖效果
Suitable For Underfloor Heating



安装便利
Easy To Install



抗菌防霉刮擦表现优秀
Superior Scratch Resistance

认证 Authentication



晟福人 新型环保弹性石晶地/墙板



环保 Environment

晟福人已被公认为全球领先的高性能和高品质地板制造商之一，我们致力于将产品环境的影响降至最低，同时在地板的整个使用寿命内最大限度地提高地板的性能效益。

Saint Fort has been recognized as one of the leading global manufacturer of high and top quality flooring, we are committed to minimize the impact of our products on the environment whilst maximizing the performance benefits of our flooring throughout their entire life.



清洁与维护 Cleaning and Maintenance

- 使用轻型吸尘器或扫帚清除地板上每天堆积的细小污垢和碎屑。
 - 用一把拖把和一把小刷子，一点肥皂、水，可以让你的SPC地板在任何时候恢复干净。使用肥皂/水混合物后一定要冲洗地板。
 - 强力、研磨性清洁剂和钢丝刷擦洗垫不得用于SPC地板。
 - 在桶里装满清水把你的湿拖把放在SPC地板上。
 - 一些乙烯基板地板可能受益于每年一次的地板抛光涂层,以防止磨损。
 - 安装前请一定阅读制造商的安装说明。
- Use a lightweight vacuum or broom to remove fine dirt and debris that builds up on flooring throughout each day.
 - Use a mop with a small brush, a little soap, water, and mop brings your SPC floors restore clean at any time. Rinse your floor after you use a soap/water mixture.
 - Strong, abrasive cleaners and wired brushed scrubbing pads should not be used on SPC floors.
 - Fill a bucket with plain water and run your damp mop over your SPC floors.
 - Some SPC floors may benefit from a yearly coat is good to protect against wear and tear.
 - Read the introduction before installation.



对比 Comparison

	晟福人SPC石晶地板 Saint Fort SPC	LVT胶粘地板 Glue Down LVT	LVT锁扣地板 Locking LVT	强化地板 Laminate
安装便捷 Fast And Easy To Install Without Acclimation	YES	NO	NO	NO
防水防滑 Resists Water Without Damage To The Flooring	YES	YES	YES	NO
尺寸稳定不收缩 Dimensionally Stable-Will Not Expand Or Contract	YES	YES	NO	NO
增加地板保温效果 Adds Warmth To The Floor	YES	NO	NO	NO
防霉变 Resists Subfloor Mold And Mildew	YES	NO	NO	NO
地面静音效果 Reduces Noise-A Quieter Floor	YES	NO	NO	NO
可直接在任何硬质平整地面安装 Installs Over Existing Hard Surface Floors	YES	NO	YES	YES



优势 Advantage

- **健康零甲醛Zero Formaldehyde**
由零甲醛材料打造而成,铺装采用自流平设计,从产品到铺装全程0甲醛
- **超防水防滑Waterproof And Skid-proof**
泡水不变形不起泡,表面层遇水更具摩擦力,老人小孩不易摔跤,高度适用公共场所和家庭生活的各个区域
- **超柔韧静音Super Flexible And No Noise**
采用创新柔韧回弹技术,令地板具有弹性,并能吸收20分贝噪音
- **超耐磨防火Fire Resistant**
耐磨度是强化地板2倍,耐磨级别高达10000转以上,防火级别达到Bf1级
- **超省心选购Suitable For Various Installation Environment**
设计4mm—8mm主流厚度,适用于各种家装和工装场合,专业工程指导,全无后顾之忧




总有一款设计， 会与你的渴望不期而遇

即刻开启你的地板世界
经历了从简单复制自然的纹路，到重新
定义地面美学。晟福人全新的地板花色
已经接近100%还原天然装饰材质的饰
面效果。而更多的晟福人地板都融入了
设计师独有的见解和想法。



颜色系列:

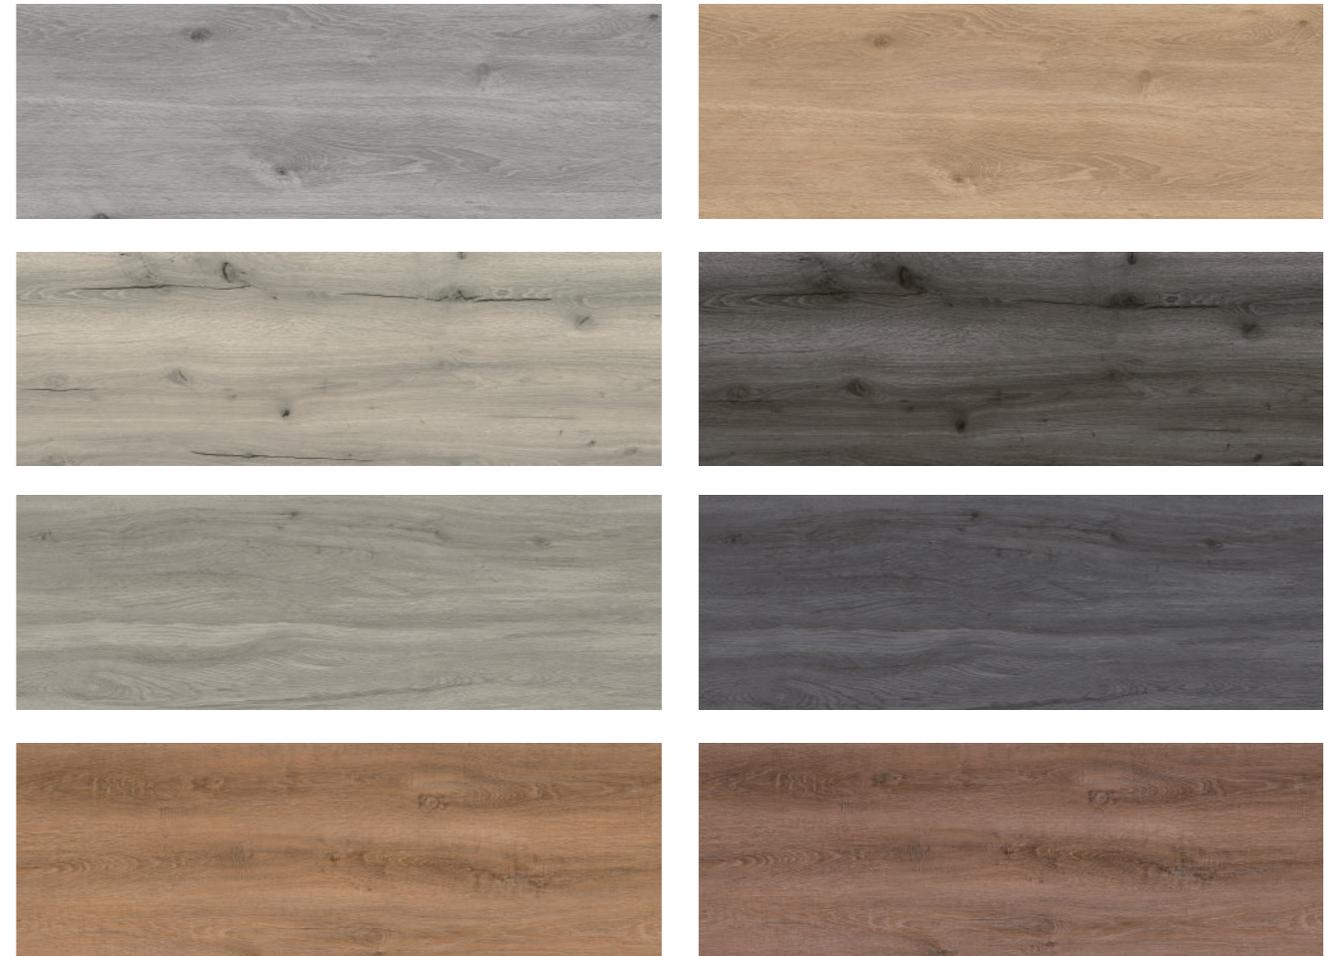

尺寸选择: 1220×183mm / 1220×228mm / 1500×228mm / 1800×228mm

厚度选择: 4-7mm


耐磨层厚度选择: 0.2-0.7mm

认证 Authentication





颜色系列:

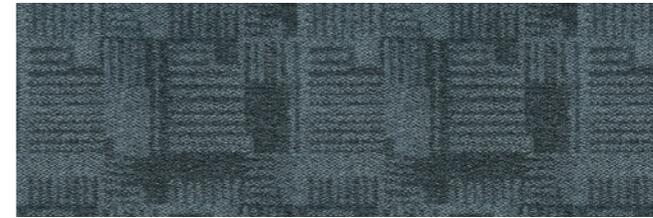

尺寸选择: 1220×183mm / 1220×228mm / 1500×228mm / 1800×228mm

厚度选择: 4-7mm


耐磨层厚度选择: 0.2-0.7mm

认证 Authentication





颜色系列:

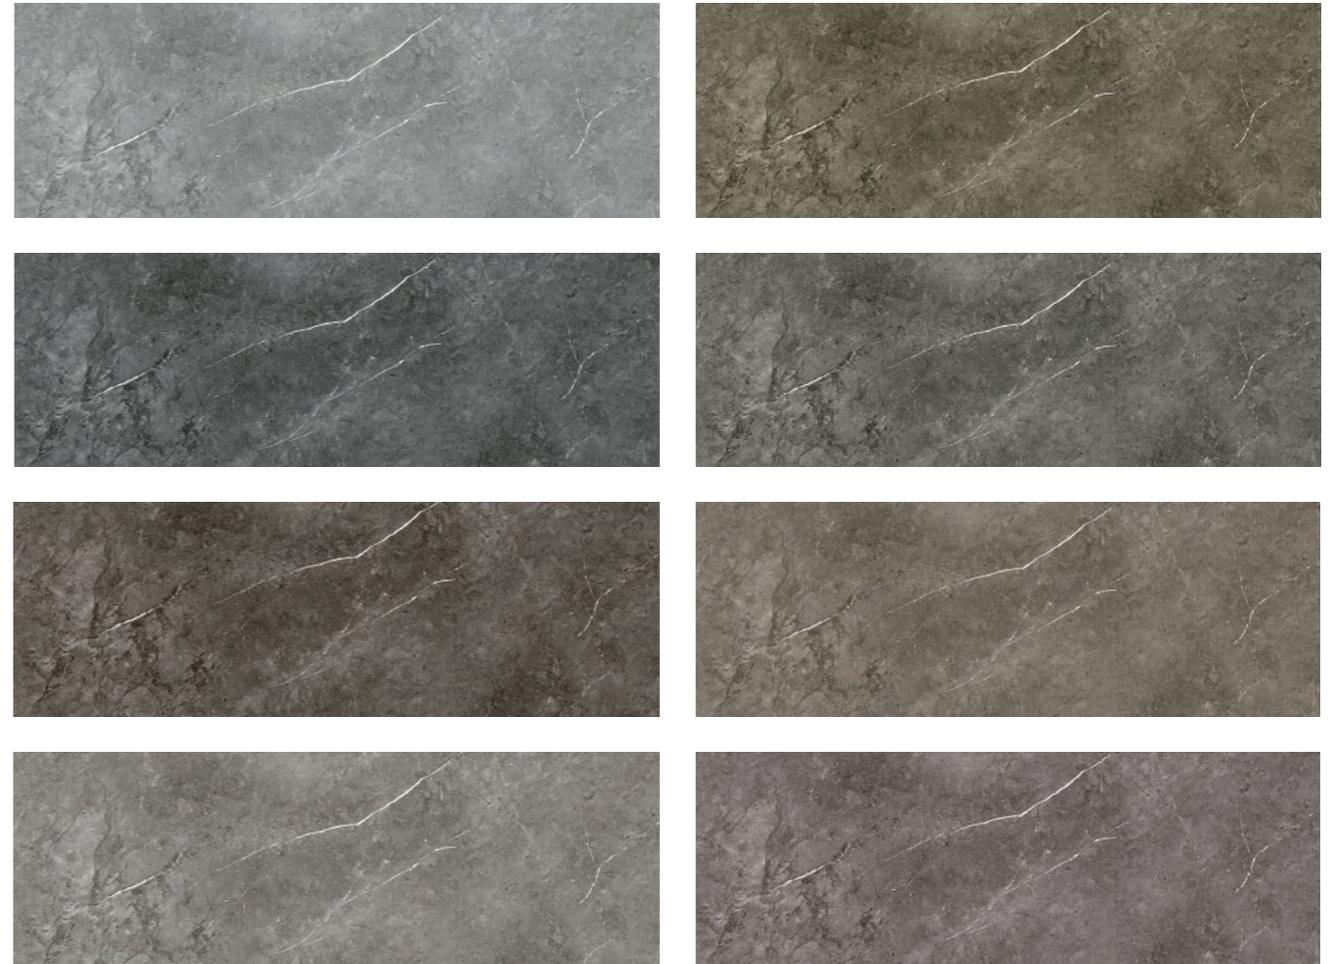

尺寸选择: 1220×183mm / 1220×228mm / 1500×228mm / 1800×228mm

厚度选择: 4-7mm


耐磨层厚度选择: 0.2-0.7mm

认证 Authentication





颜色系列:

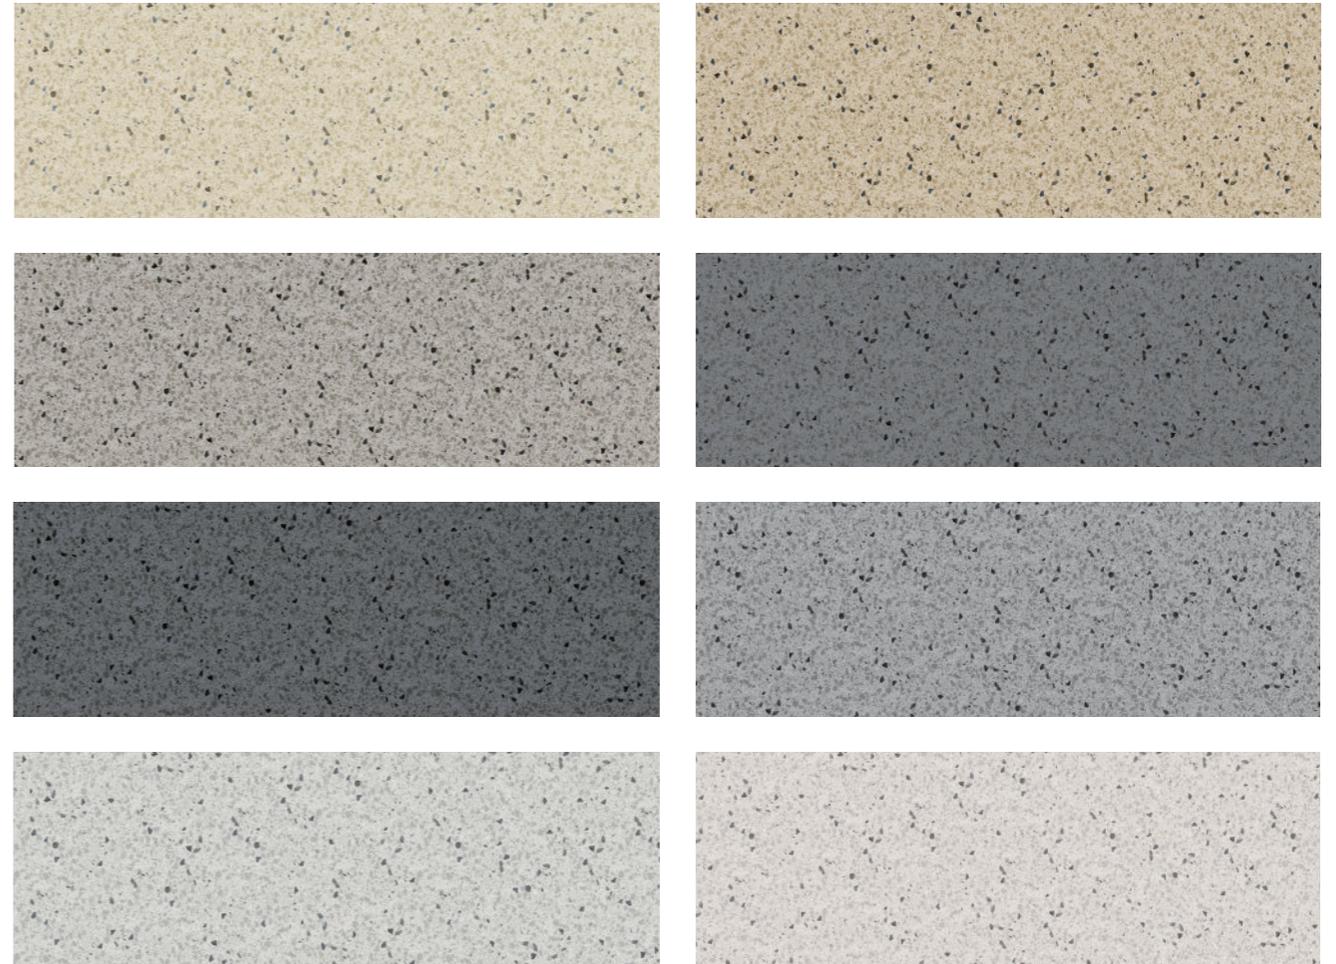

尺寸选择: 1220×183mm / 1220×228mm / 1500×228mm / 1800×228mm

厚度选择: 4-7mm

耐磨层厚度选择: 0.2-0.7mm

认证 Authentication



2G+5Gi锁扣设计

一拍即可，安装更便捷!

安装步骤:

1. 放好水平线或从房间左上角开始放置第一块地板，将其两条凸榫边靠墙边放置，为了防止地板的自然膨胀，地板与墙边之间应预留5mm左右的间隙。
2. 安装第一排第二片时，将第二片的凸榫边放在第一片的凹槽内，用力一拍或者用橡胶锤轻轻一敲即可，继续用同样的方法进行下片安装。
3. 开始安装第二排，使用第一排最后一块地板切下来的剩余部分（不能小于20cm），安装在第二排的第一片，安装时将长片的凸榫插入第一排地板的凹槽内。
4. 安装第二排第二片时，将第二片的长边插入第一排的凹槽内，将凸榫对准第二排第一片的凹槽，用力一拍或者用橡胶锤轻轻一敲即可，继续用同样的方法进行下片安装。
5. 最后使用同样的方法安装房间内其他地板，须注意室内所有靠边固定物品或墙面之间，都留出必要的膨胀间隙（包括墙壁、门缝和橱柜等固定家具）。



技术参数(Technical Parameter)

CHARACTERISTICS	TEST METHOD	RESULT	
尺寸	Dimension	EN ISO 24342	180x1220mm,305x610mm
总厚度	Thickness overall	EN ISO 24346	4.0mm,5.0mm,6.0mm,6.5+1.5mm
耐磨层厚度	Thickness wear layer	EN ISO 24346	0.3mm,0.5mm
单位重量	Determination of mass per unit area	ISO 23997	8.0kg/m ² ,10.0kg/m ² ,12.0kg/m ² ,13.5kg/m ²
层与层剥离拉力	Peeling strength of layers	EN 431	Pass
防滑性	Slip resistance	DIN 51130	R9
残余凹陷	Residual indentation	ISO 24243	≤0.6mm
色牢度	Color fastness to light	ISO 105-B02	≥6
尺寸稳定性	Dimensional stability	ISO 23999	≤±0.1%
防火性	Resistance to fire	EN ISO 11925-2	Bf1
高温翘曲	High temperature warping	ISO 23999	≤0.1mm
耐磨耗	Abrasion	EN 660	P 级
甲醛含量测试	Formaldehyde content test	EN 717-1	N.D. (未检出)
重金属检测	Heavy metal elements	EN 71-3	N.D. (未检出)
锁扣强度	Locking Strength	ISO 234334	Complies

适用于学校、商务办公、酒店、家庭装修

时尚多样 适合地暖 防潮防腐 承重防滑 吸音防噪 阻燃防火 保养方便 铺设简单

